

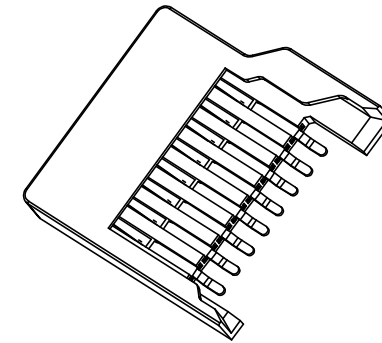
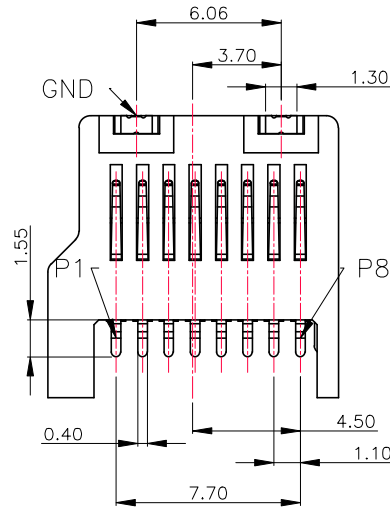


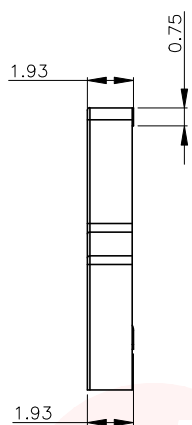

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

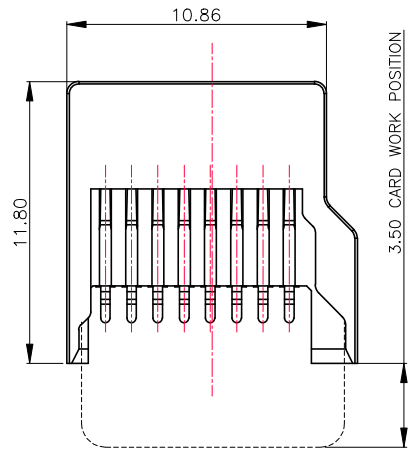

NOTES:

1.MATERIAL:


HOUSING:LCP E130I,UL 94V-0,30%G/F FILLED;
 COLOR:BLACK
 CONTACT:COPPER ALLOY T=0.15MM
 GROUND:COPPER ALLOY T=0.15MM

2.FINISH:


CONTACT: 1U" GOLD PLATING ON CONTACT AREA
 TIN 100U" MIN PLATING ON SOLDER TAILS
 50U" MIN NICKEL UNDERPLATING OVER ALL
 GROUND: SN 100U" MIN PLATING ON SOLDER TAILS
 50U" MIN NICKEL UNDERPLATING OVER ALL

3.PRODUCT SPECIFICATIONS:


VOLTAGE RATING: 50V
 CURRENT RATING: 0.5A
 INSULATION RESISTANCE: 500MEG.OHM MIN
 CONTACT RESISTANCE: 50 MILL.OHM MAX
 OPERATION TEMPERATURE: -20° TO +85°
 DURABILITY: 5000 CYCLES

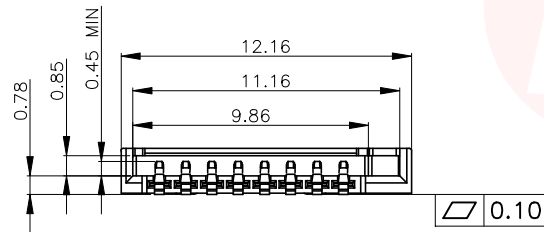

CONNECTOR PROFILE

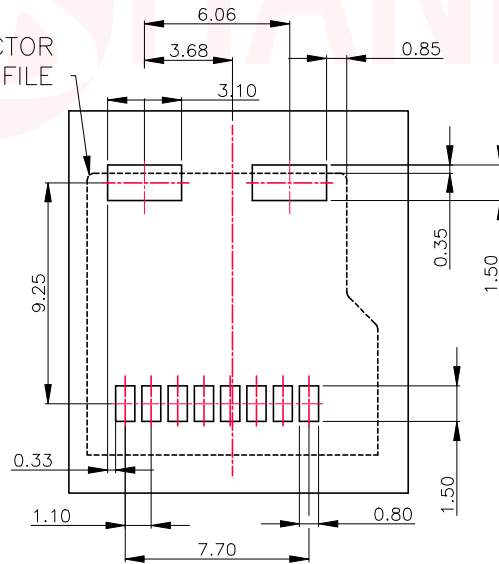

RECOMMENDED P.C.B HOLE LAYOUT
 COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

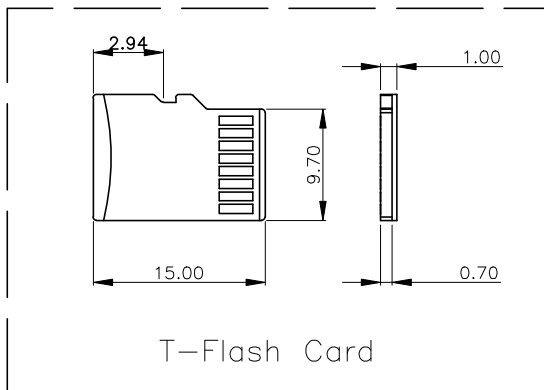

T-Flash Card

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
 X :±0.5 X :±2°
 X.X :±0.20 X.X :±1°
 X.XX :±0.10



东莞市汉博电子科技有限公司
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	T-FLASH 全塑简易卡		
DWN	xiong	TF-017	
CHKD	lee	SCALE:1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET:10F 1
		REV: A4	
CUSTOMER COPY			